


Cellu-Pro™

POLYETHYLENE FOAM PROFILES

Contain a minimum of 95% recycled raw material with **UNE-15343 certification** for packaging applications, construction and leisure.

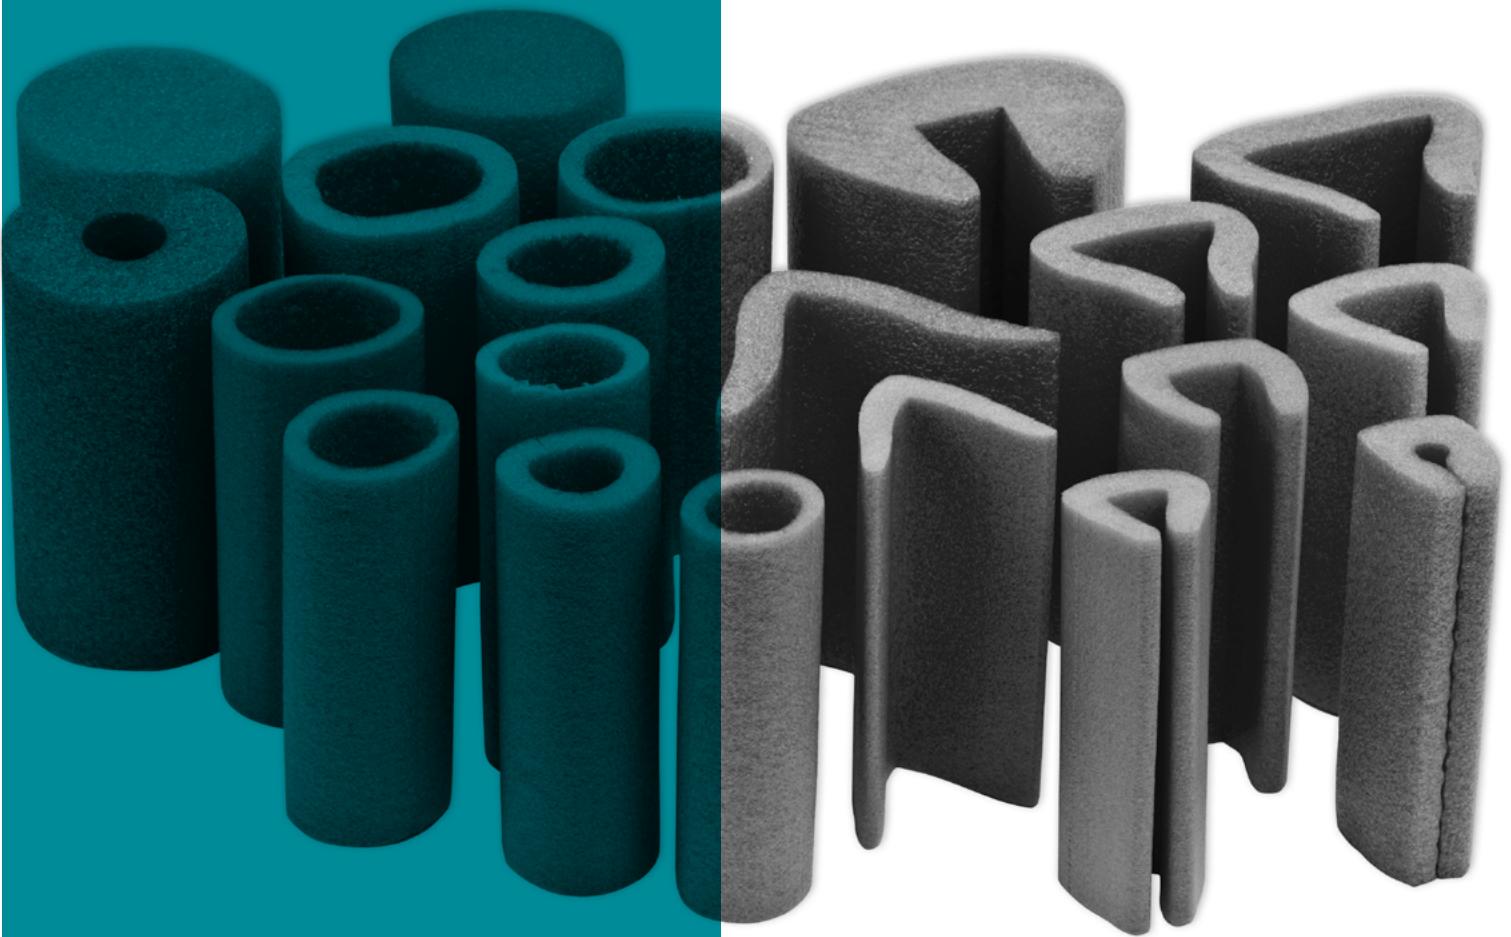

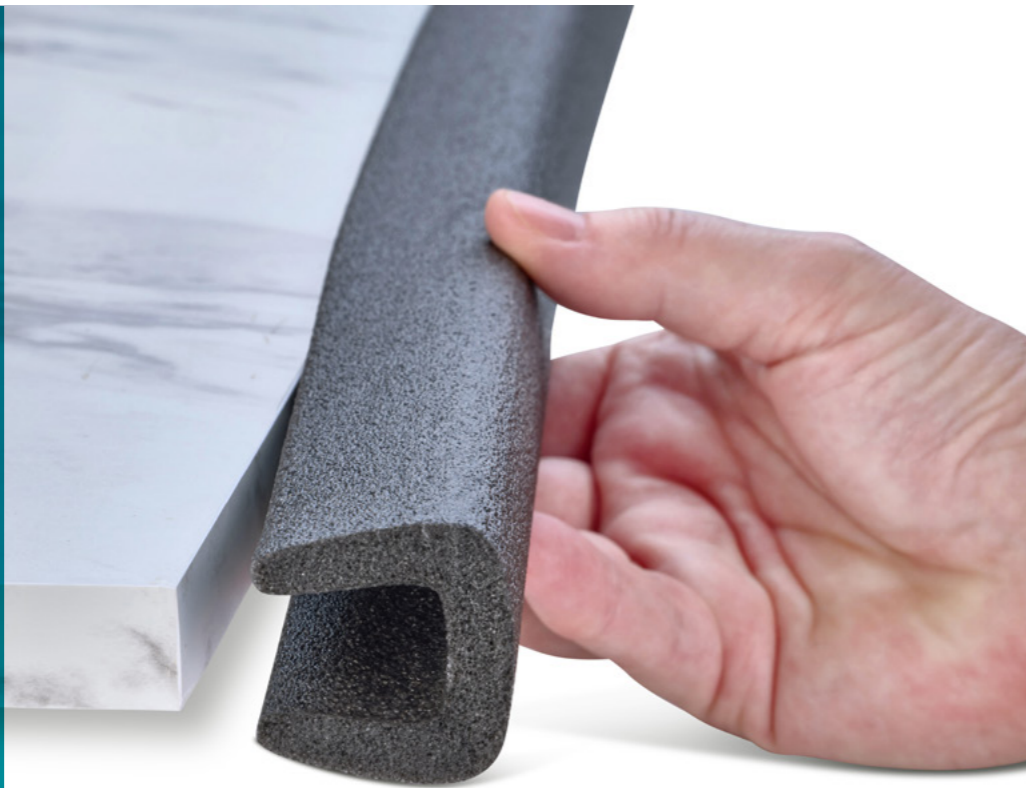

RANGE OF STANDARD


Our range of LDPE Cellu-Pro™ foam profiles provide high protective packaging to prevent damage to a wide variety of products:

Electronics, furniture, appliances, automotive components and many more.

In addition, Cellu-Pro™ PE foam profiles are a perfect solution for insulation and leisure applications.



MODEL	A MM	B MM	C MM	D MM	LENGTH	DENSITY KG/M ³	COD. SAP	PROFILES X CAJA
U 8-18	7, -3 +2	9, -1+2	18, ±2	30, ±2	2m ±20mm	27 ±5	101071429	250
U 15-25	10, -3 +2	9, -1+2	24, ±2	35, ±2	2m ±20mm	27 ±5	101071430	190
U 15-30	10, -3 +2	11, -1+2	32, ±2	40, ±2	2m ±20mm	27 ±5	101071425	140
U 25-45	20, ±4	12, -1+2	43, ±3	50, ±3	2m ±20mm	27 ±5	101071426	90
U 40-60	30, ±5	13, -1+2	58, ±3	60, ±3	2m ±20mm	27 ±5	101071427	75
U 60-80	40, ±5	15, -1+2	80, ±3	68, ±3	2m ±20mm	27 ±5	101071428	50

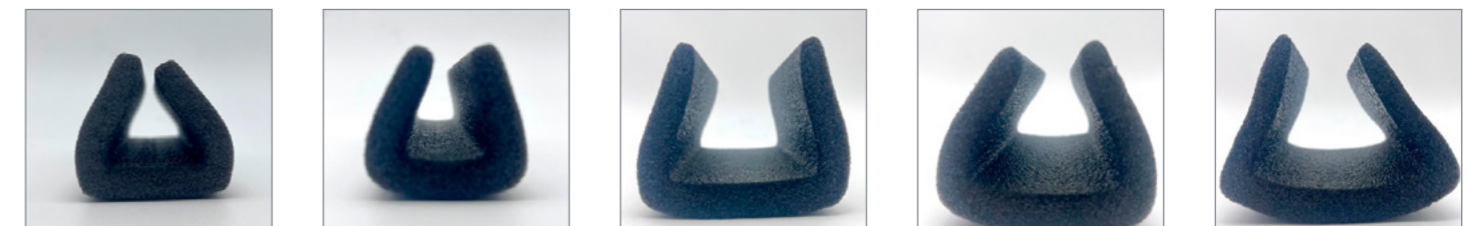

If you would like more information about Cellu-Pro™, please contact your local distributor.





RANGE OF STANDARD

MODEL	A MM	B MM	C MM	D MM	LENGTH	DENSITY KG/M ³	COD. SAP	PROFILES X CAJA
O 22-9	22, ±2	9, -1+2	n/a	n/a	2m ±20mm	27 ±5	101071421	195
O 28-9	28, ±2	9, -1+2	n/a	n/a	2m ±20mm	27 ±5	101071422	150
O 35-9	35, ±2	9, -1+2	n/a	n/a	2m ±20mm	27 ±5	101071423	110
O 42-9	42, ±2	9, -1+2	n/a	n/a	2m ±20mm	27 ±5	101071424	85
O 22-6	22, ±2	6, -1+2	n/a	n/a	2m ±20mm	27 ±5	101071417	230
O 28-6	28, ±2	6, -1+2	n/a	n/a	2m ±20mm	27 ±5	101071418	170
O 35-6	35, ±2	6, -1+2	n/a	n/a	2m ±20mm	27 ±5	101071419	135
O 42-6	42, ±2	6, -1+2	n/a	n/a	2m ±20mm	27 ±5	101071420	95





If you would like more information about Cellu-Pro™, please contact your local distributor.

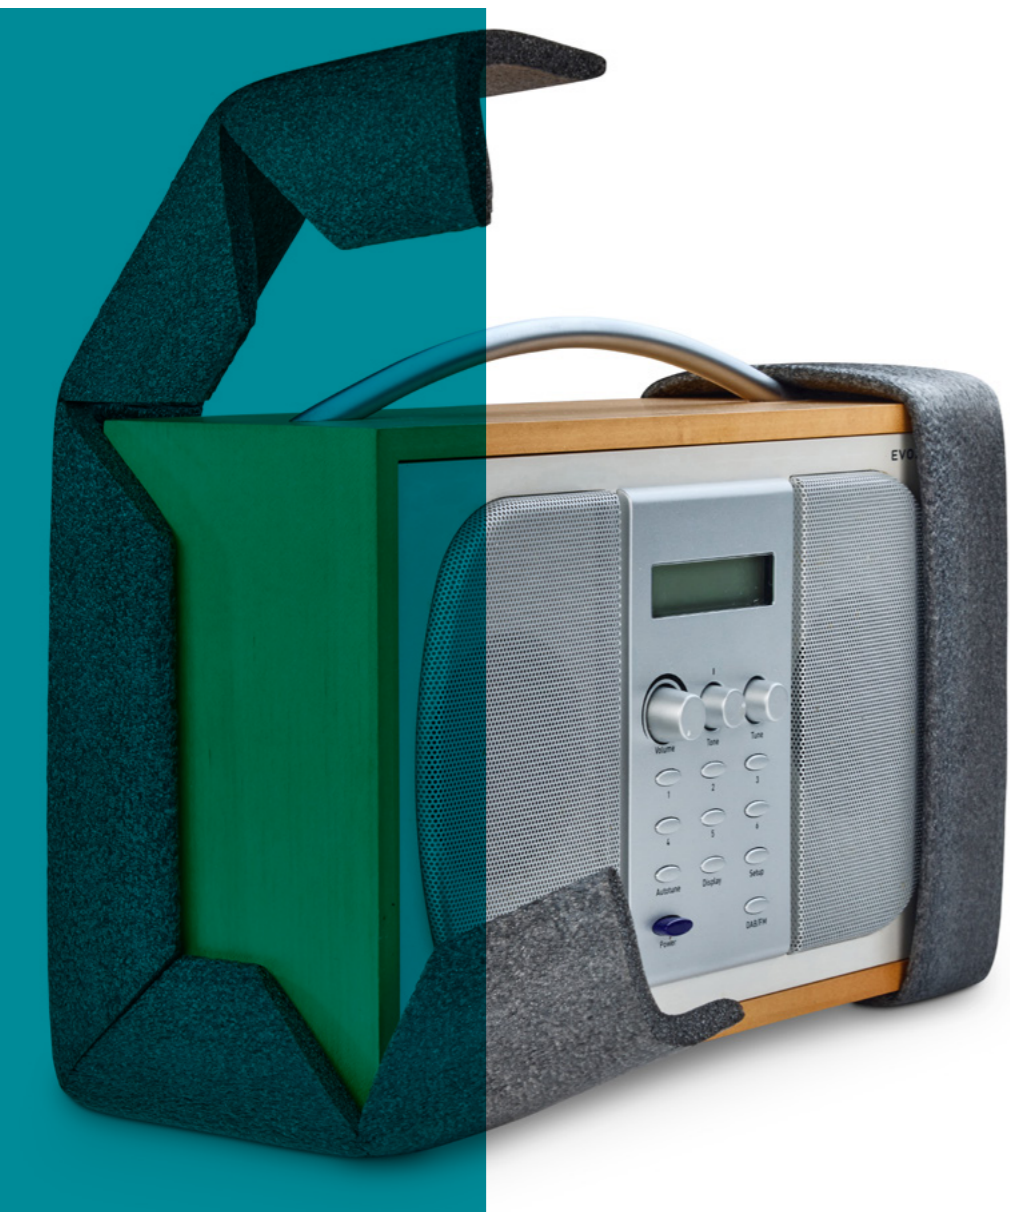

RANGE OF STANDARD

MODEL	A MM	B MM	C MM	D MM	LENGTH	DENSITY KG/M ³	COD. SAP	PROFILES X CAJA
L 45	45, ±2	8, -1+2	n/a	n/a	2m ±20mm	27 ±5	101071415	240
L 75	75, ±3	10, -1+2	n/a	n/a	2m ±20mm	27 ±5	101071414	135

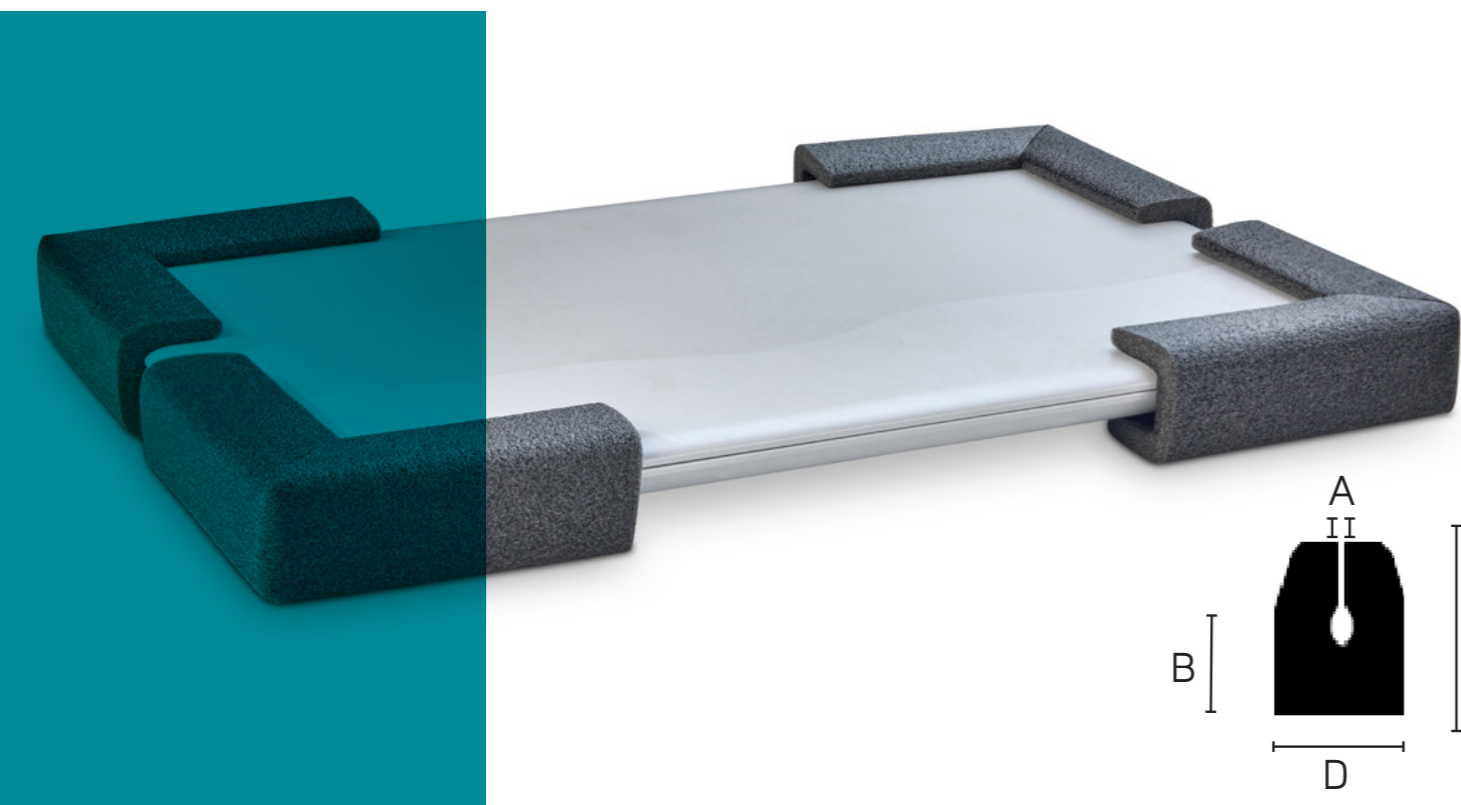


MODEL	A MM	B MM	C MM	D MM	LENGTH	DENSITY KG/M ³	COD. SAP	PROFILES X CAJA
C 1	7, ±2	14, -1+2	36, ±2	28, ±2	2m ±20mm	27 ±5	101071413	250




GLASS SPECIAL

If you would like more information about Cellu-Pro™, please contact your local distributor.

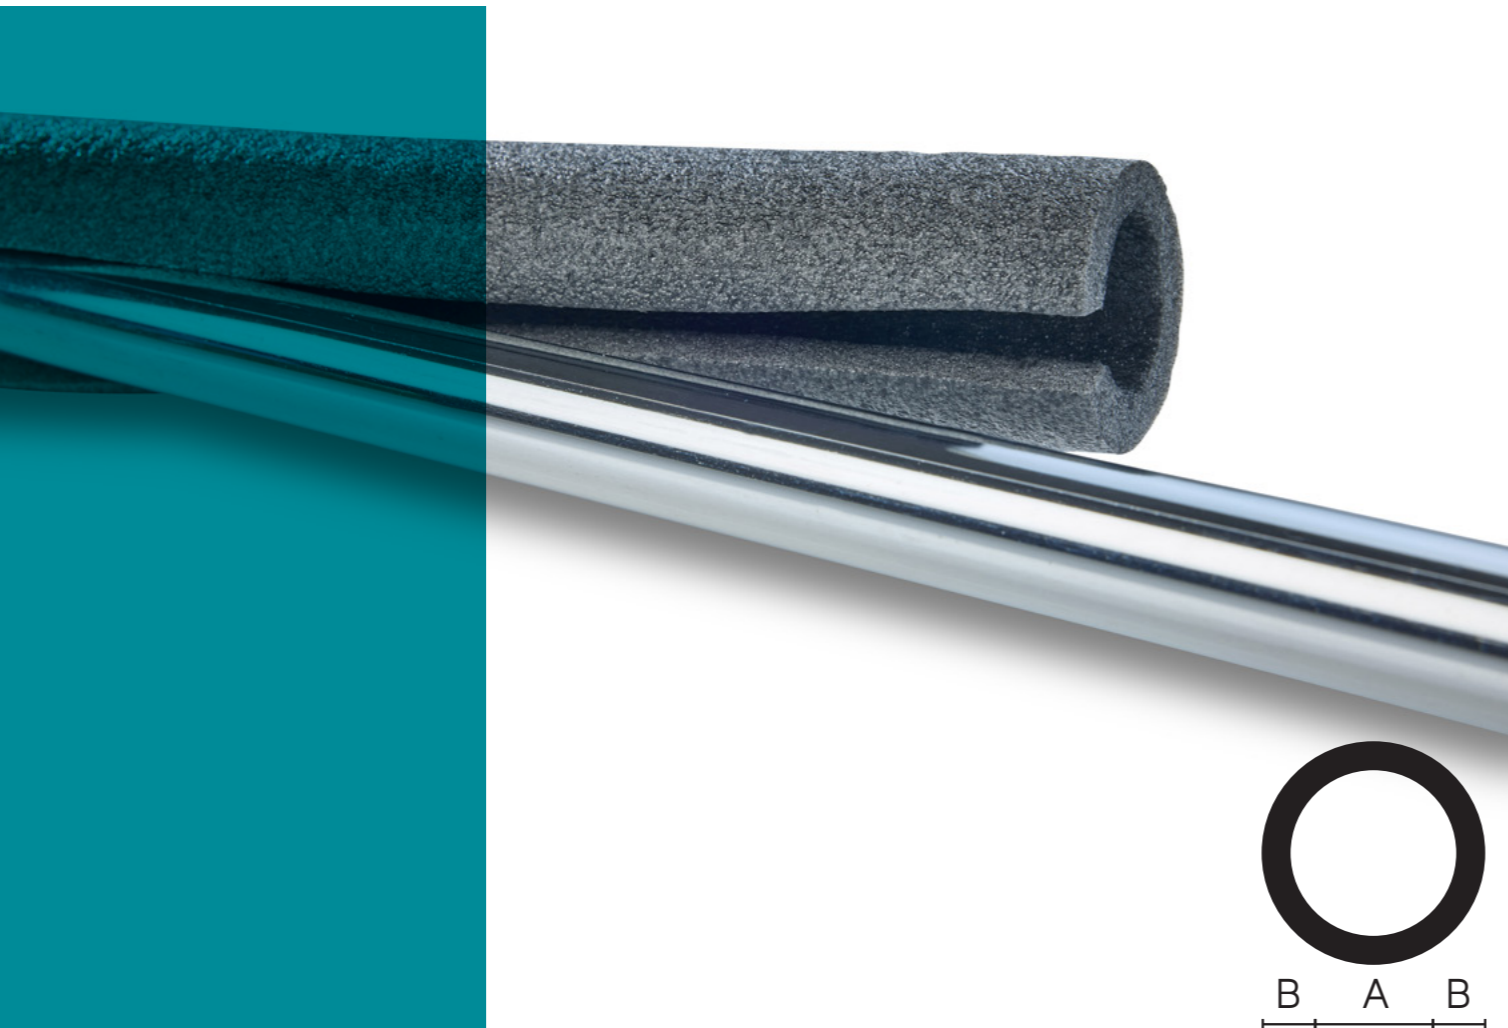

RANGE OF NON-STANDARD

MODEL	A MM	B MM	LENGTH
O 15-9	15, ±2	9, -1+2	2m ±20mm
O 52-9	52, ±2	9, -1+2	2m ±20mm

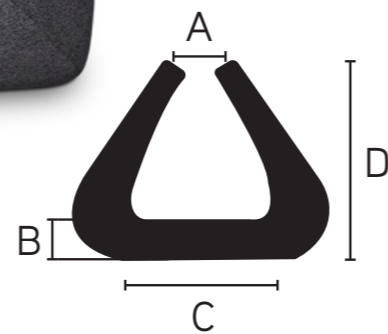




MODEL	A MM	B MM	C MM	D MM	LENGTH
U 60-90	40, ±5	16, -1+2	88, ±3	68, ±3	2 m ±20mm



If you would like more information about Cellu-Pro™, please contact your local distributor.

RANGE OF NON-STANDARD

MODEL	A MM	B MM	C MM	D MM	LENGTH
C 3	5, ±2	12, -1+2	34, ±2	26,±2	2 m ±20mm

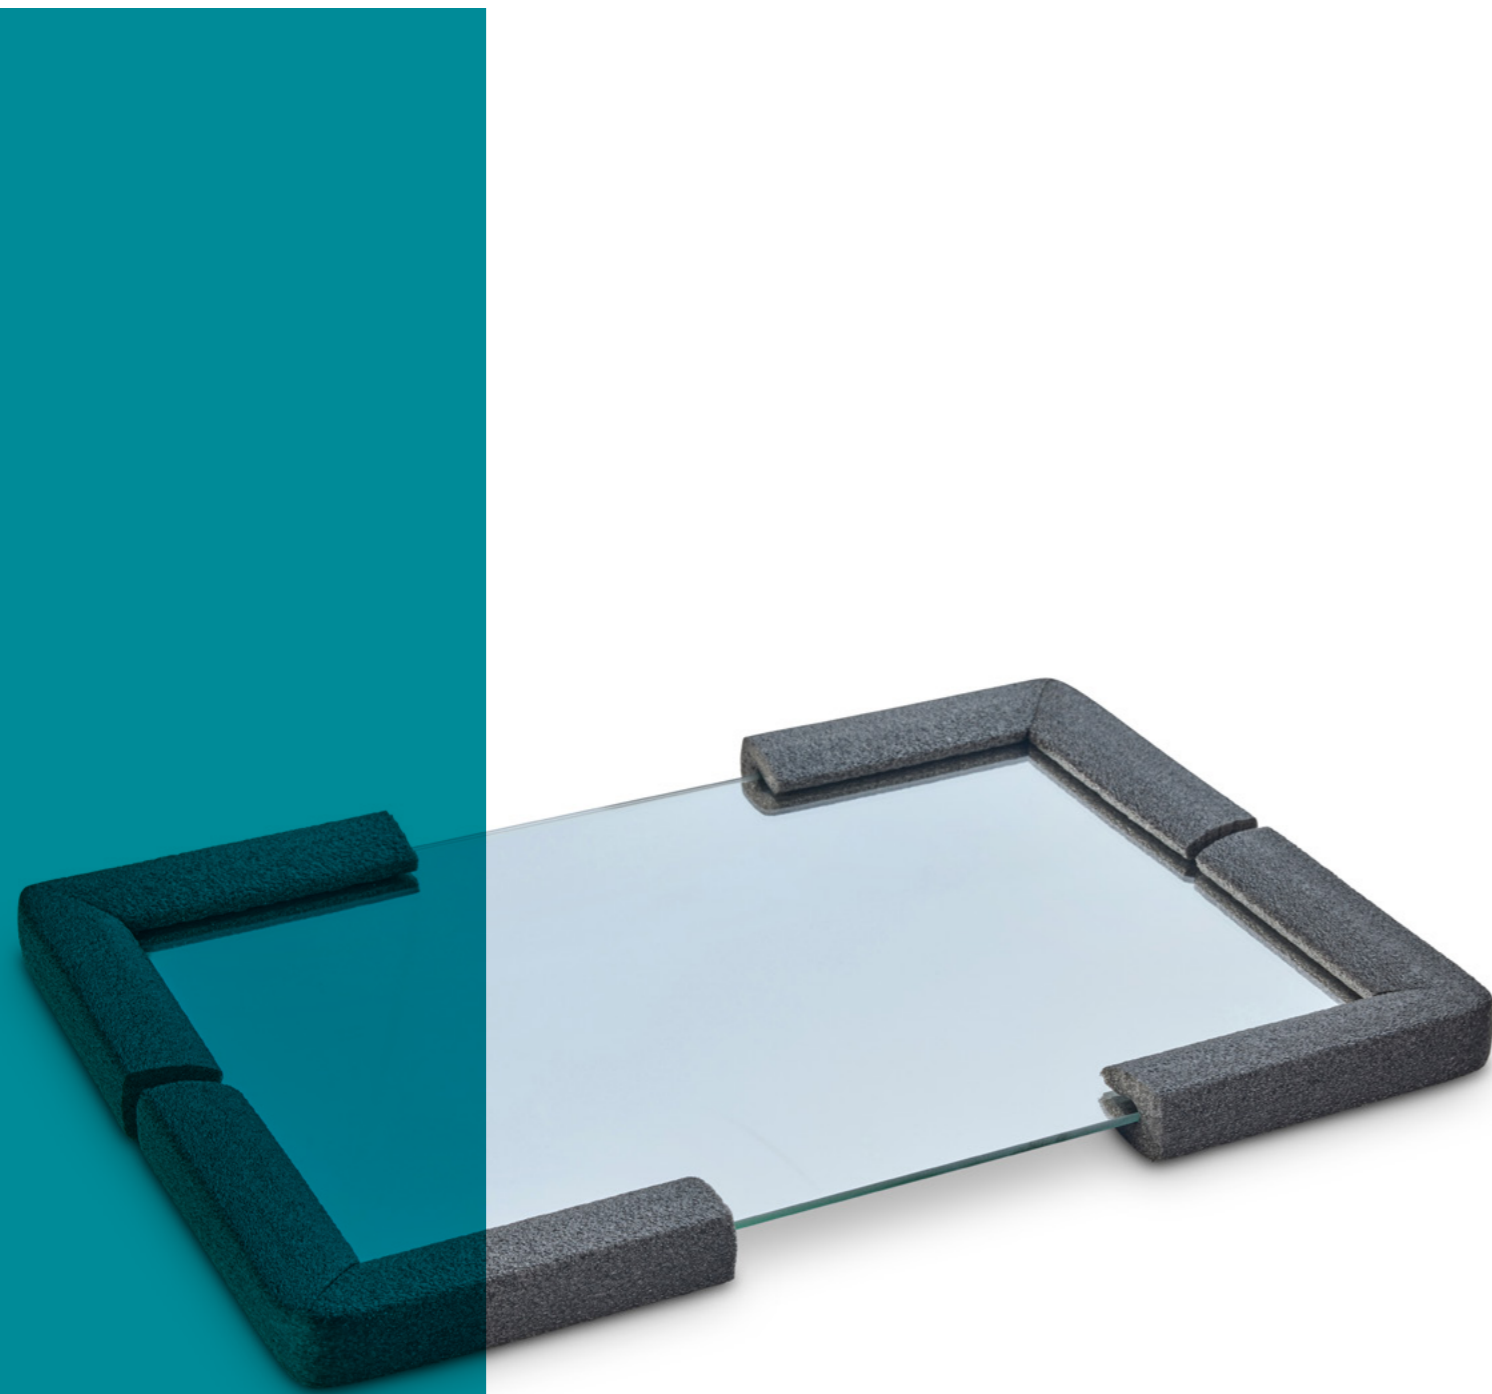


If you would like more information about Cellu-Pro™, please contact your local distributor.

Our Polyethylene foams are compatible with mechanical recycling streams of LDPE and recyclable in many locations. They are **Certified** according to the **UNE-15343 standard**.

Degree of recyclability will vary depending on scope and availability of flexible film collection, sortation and recycling programmes.

-30%
reduction in
CO₂ footprint

**CELLU PRO™
Profile
1.84kg
CO₂ eq/kg**



**Virgin
Profile
2.84kg
CO₂ eq/kg**



The carbon footprint results presented here include raw materials, average transport distances to manufacturing plants, resources use during manufacturing processes, and the impact of waste.

Sealed Air®
BRAND PROTECTIVE PACKAGING

SEE
Telford Way
Kettering NN16 8UN
United Kingdom

T: +44 1536 315700
E: info-pack@sealedair.com
www.sealedair.com/uk

The information on this brochure is intended as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract.

